


DESCRIPTION

The **CBS ArcSafe® RSA-103** remote switch actuator (RSA) is designed to operate the Sylvania/Zinsco QSF series of 100–600 A panelboard switches (PBSs) without having to modify existing electrical equipment thanks to CBS ArcSafe’s magnetic latching system. The lightweight, portable RSA-103 allows technicians to remotely close or trip the Sylvania/Zinsco PBS from a safe distance of up to 300 feet while remaining stationed outside the arc-flash boundary. The RSA-103 is compatible with 100–600 A switches. Typical applications include switching and protection of low-voltage AC power distribution systems. Designed, manufactured, and assembled in the United States, all RSA units are portable, fast, and easy to set up; offer mechanical and/or electrical safety protection; are adjustable to fit unique electrical equipment configurations; reduce the requirements for personal protection equipment; and help customers with NFPA 70E arc-flash safety compliance. Optional features include radio remote with a range of up to 300 feet, 24 V DC LED light, wireless video camera system with LCD monitor, and a rugged protective case assembly.

SPECIFICATIONS

WEIGHT:	17 lbs.
DIMENSIONS:	8.3" H x 17.8" W x 8.6" D
POWER CONSUMPTION:	50 W
OPERATING DISTANCE:	25–300 ft.
COMPATIBILITY:	Sylvania/Zinsco QSF Series 100–600 A
CONTROL/POWER SOURCE:	CBS ArcSafe® RSO-I AR control console

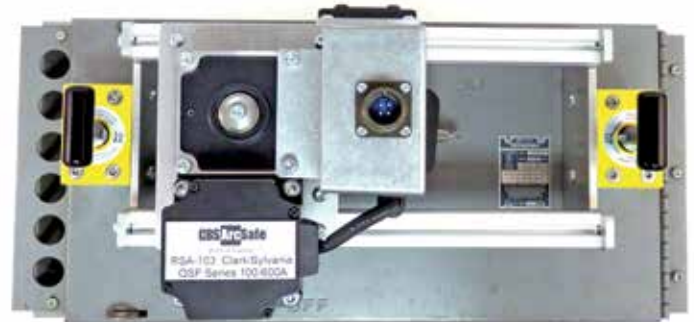

OVERVIEW

- Remote operation from up to 300 feet away
- Lightweight and portable for hard-to-access areas
- Simple setup, no equipment modification required
- Reduces or eliminates need for arc-flash hazard suits
- Designed, manufactured, and assembled in the USA

